




GLAZE PLUS

TECHNICAL DATA SHEET

PRO DARK(Stone Color Enhancer &Impregnating Sealer)

PRO-DARK

Stone Color Enhancer & Impregnating Sealer

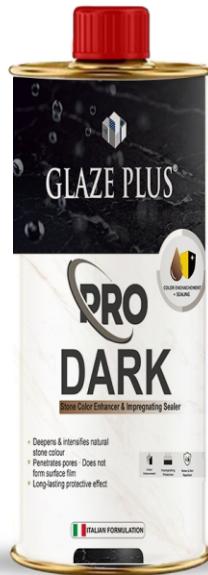

DESCRIPTION

PRO DARK is a ready-to-use, solvent-based stone color enhancer and impregnating sealer designed to intensify the natural color and structure of absorbent natural and artificial stone surfaces. The product penetrates deeply into the stone's pores by capillary action without forming a surface film, ensuring long-lasting protection while maintaining the stone's natural breathability and appearance. **PRO DARK** is especially suitable for enhancing the color of dark and black stones and provides durable protection against water and dirt ingress.

ADVANTAGES

Permanent colour enhancement
 Deep impregnation, no surface film
 Uniform stone appearance
 Long-term protection
 Non-yellowing & weather-resistant

PRODUCT FEATURES

- Deep color enhancement of natural stone
- Penetrating impregnation without surface coating
- Maintains natural lustre of polished and fine-ground surfaces
- Water- and dirt-repellent effect
- Weather-resistant and durable
- Non-yellowing formulation
- Suitable for interior and exterior applications
- Ready-to-use solvent-based system

AREAS OF APPLICATION

For the treatment and protection of absorbent natural and artificial stone surfaces, including:

- Granite
- Marble
- Limestone
- Slate
- Sandstone
- Terrazzo
- Concrete ashlar
- Quartz-based surfaces
- Cotto

Especially recommended for dark and black stones such as Nero Assoluto, Impala Black, Galaxy, Zimbabwe Black, and similar materials.

APPLICATION INSTRUCTIONS

Surface Preparation

The surface must be clean, dry, and free from dust, grease, waxes, and residues.

Ensure the stone does not contain soluble salts (nitrates, sulphates, chlorides), as these may reduce absorption.

After cleaning, allow the surface to dry completely (minimum 24 hours).

Application Method

Apply undiluted using a brush, mop, pad, or spraying equipment.

Apply a thin, even layer and allow the product to penetrate into the stone.

After 10–15 minutes, redistribute evenly or remove excess material completely using an absorbent cloth.

Highly Absorbent Surfaces

Multiple wet-on-wet applications may be required.

Always remove excess material to avoid surface residues.

TECHNICAL DATA

Property	Value
Chemical base	Solvent-based
Appearance	Slightly turbid liquid
Density	Approx. 0.84 g/cm³
Application form	Ready to use
Coverage	Up to 30 m² / liter*
Working temperature	+15°C to +25°C
Initial drying time	Approx. 60 minutes
Full protective effect	Approx. 24–48 hours
Weather resistance	Excellent
Colour stability	Non-yellowing

SURFACE FINISHES

Suitable for:

- Fine-ground surfaces
- Ground surfaces
- Satinated finishes
- Antique finishes
- Polished stone surfaces

Not suitable for glazed or non-absorbent surfaces.

HEALTH & SAFETY

- Use appropriate personal protective equipment during application.
- Avoid inhalation of vapors; ensure adequate ventilation.
- Do not allow aerosols to form during spray application.
- Refer to the Safety instructions before handling or using this product.

STORAGE & SHELF LIFE

- Store in a cool, dry place in the original, tightly closed container.
- Protect from heat and direct sunlight.
- Shelf life: Up to 2 years when stored correctly.

TECHNICAL SUPPORT

9/47 Subhash Nagar, New Delhi 110027 | C401 - Swami Narayan Business Park, Narol Circle Ahmedabad - 382405

| www.glazeplusitaly.com | www.glazeplus.in | sales@glazeplus.in

Helpline no. +918368077496